



STANLEY®

GAS WATER HEATER 12LT/MIN CAPACITY

¡NEW!

STXGWHG1200H

FIVE-STEP STERILIZATION

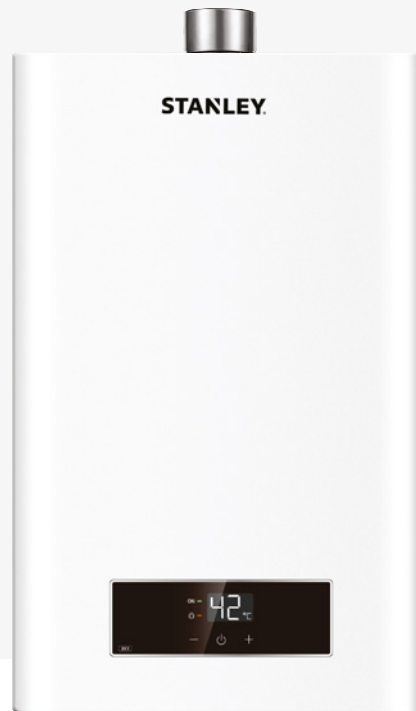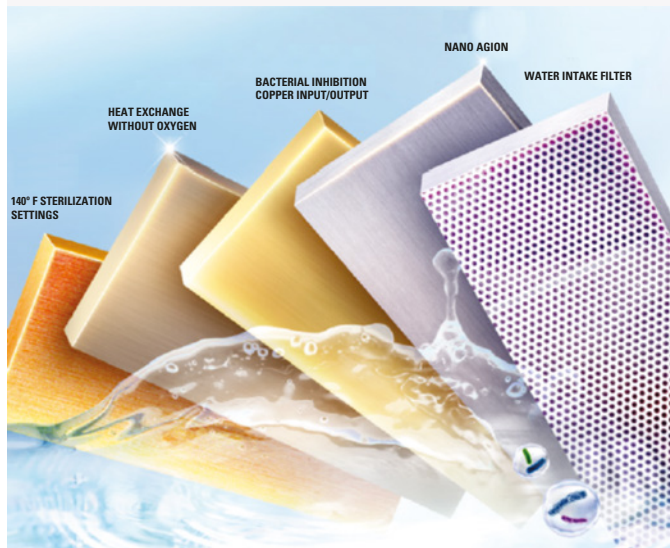

NOM



OVERTIME PROTECTION

Automatic shutdown after 60min.

OXYGEN FREE COPPER HEAT EXCHANGER (OFC)

It offers greater thermal efficiency, energy savings, longer life and inhibits bacterial growth.

SAVES ELECTRICITY

To save energy, the display automatically dims after 2 minutes of non-use.

CONSTANT OXYGEN FLOW

CC fan that maintains stable performance, even in extreme weather conditions.

SPECIFICATIONS

Model No.	STXGWHG1200H
Voltage	220V~
Frequency	60Hz
Rated thermal power	25,000W
Heating element material	Copper
Material of the lining tank	Oxygen-free copper heat exchanger
Outer Cover material	Steel plate with coating
IP Rating	IPX4
Efficiency	≥ 84%
Consumption	LPG-1.736 m3/h
Ignition mode	Automatic
Capacity	12 L
Temperature control range	Digital
Exhaust type	Forced
Net Weight	8.2 kg
Product Dimensions	340x540x165 mm
Packaging Dimensions	756x516x264 mm
UPC Code	810073477568

THE MEASURE OF A PRO™